

ALN1SGPX L1/L2 GPS Low Noise Amplifier



ALN1SGPX Low Noise Amplifier

AMP's ALN1SGPX low noise amplifier (LNA) is designed for use on L1/L2 GPS receivers. When placed in-line between the antenna and receiver, the LNA provides 17.5 dB of signal gain to the receiver.

The ALN1SGPX low noise amplifier is a compact, yet rugged LNA designed to IP67 for good environmental sealing. If the ALN1SGPX LNA does not meet your exact specification, contact us for a custom solution.

Specifications

Electrical Characteristics


Minimum Frequency:	1212 MHz
Maximum Frequency:	1580 MHz
Noise Figure (Typical):	0.9 dB
Gain (Typical):	17.5 dB
P1dB (Typical):	+15 dBm
Input VSWR:	<1.5:1
Output VSWR:	<1.5:1
DC Voltage (Nominal):	5 Vdc
DC Current (Typical):	40 mA
Input Power (Max):	+15 dBm

Mechanical Characteristics

Dimensions:	1.25" x 1.00" x 0.50"
Material:	CNC Machined T6061-T6 Aluminum
Finish:	Clear Iridite
Weight:	<1 oz.
Connectors:	SMA Female

Environmental

Temperature:	-20C to +50C
Seal Rating:	IP67

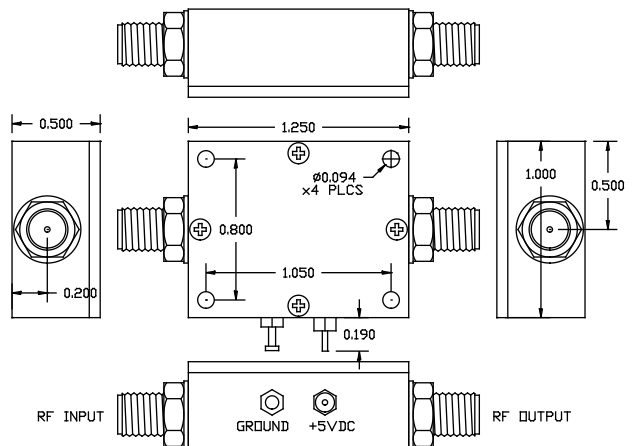

Advanced Microwave Products
PO Box 1437
2465 Old Highway 40 West, Suite 200
Verdi, NV 89439

Phone: (775) 345-9933
E-mail: sales@advmw.com
Web: www.advmw.com