

VDR1 Analog Diversity Video/Audio/Data Receiver

Ultra Compact Diversity Receiver. Ideal for Covert Operations, UAVs, and UGVs!



VDR1 Series

AMP's VDR1 Series 7.4 cubic inch diversity video receivers offer high quality diversity reception with many advanced features including miniature packaging, low power consumption, low noise figure, and video inversion. All receivers utilize a robust machined aluminum chassis and high quality connectors designed to withstand harsh environments.

VDR1 receivers feature a proprietary voting circuit that ensures reception of the strongest signal at all times. Innovative circuit designs are utilized to reduce power consumption for significantly longer battery life and to reduce noise figure for substantially more range and better video quality.


Receiver carrier frequency may be selected locally with BCD rotary switches, remotely, and locally/remotely with a programmable binary switch. Slide switches allow selection between standard (positive) and inverted (negative) video and subcarrier On/Off. Received signal strength is indicated with a local display (LCD meter or LED bar) and via remote query. If equipped with an LED displays, intensity may be controlled by a local pushbutton switch.

If your application requires video and audio or data reception, VDR1 receivers are optionally configured with up to 2 audio or data subcarriers with dual outputs for driving auxiliary devices.

VDR1 receivers are ideal for law enforcement, surveillance, UAV, UGV, Military, and other applications requiring high quality diversity video reception in a compact, rugged package.

Design Features

- 7.4 Cubic Inch Package (2.50"x3.50"x0.85")
- Weighs < 6 oz.
- Low Current Draw (Extends Battery Life)
- Low Noise Figure (More Range)
- Full Frequency Band Channelization
- 3 Frequency Selection Modes
- Supports Composite Video (NTSC or PAL)
- Optional Dual Audio or Data Subcarriers
- Received Signal Strength Indication (Dual Chassis Displays and Remote Query)
- J-STD-001D Class 3 Assembly (Medical/Aerospace)

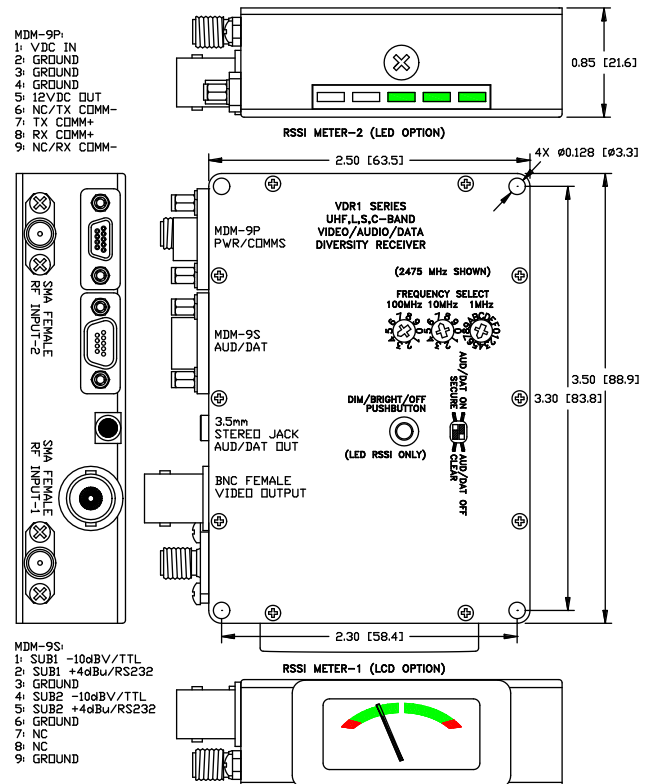

Advanced Microwave Products
 PO Box 1437
 2465 Old Highway 40 West, Suite 200
 Verdi, NV 89439

Phone: (775) 345-9933
 E-mail: sales@advmw.com
 Web: www.advmw.com

RF Characteristics

Frequency Range (Specify):	UHF:	340.0-399.9 MHz	100 kHz Channels
(Other Ranges Available)	Lower L-Band:	1435-1535 MHz	1 MHz Channels
	Upper L-Band:	1700-1850 MHz	1 MHz Channels
	Lower S-Band:	2200-2399 MHz	1 MHz Channels
	Upper S-Band:	2400-2499 MHz	1 MHz Channels
	Full S-Band:	2200-2499 MHz	1 MHz Channels
	Dual L/S-Band:	1700-1850/2200-2499 MHz	1 MHz Channels
	Lower C-Band:	4400-4900 MHz	1 MHz Channels
	Upper C-Band:	4900-4999 MHz	1 MHz Channels
	Full C-Band:	4400-4999 MHz	1 MHz Channels
	5.8 GHz:	5725-5875 MHz	1 MHz Channels
Frequency Selection (Specify):	Full Band Channelized - Remote Control Only or Remote/Programmable Switch/Local BCD		
Maximum RF Input:	+10 dBm Without Damage		
Input Impedance:	50 Ω Nominal, VSWR 2:1 Maximum		
Noise Figure:	< 3 dB		
Image Rejection:	> 60 dB		
Signal Strength Output:	Local Displays and Remote Query		
Voting Characteristics	RSSI Based, > 150 kHz Voting Rate		

LO/IF Characteristics

LO Stability:	±5 ppm Over -20°C to +60°C
IF Frequency:	UHF: 153.6 MHz, L/S: 374 MHz, C/5.8 GHz: 480 MHz
IF Bandwidth:	17 MHz Nominal
Harmonic and Spurious Level:	-25 dB Maximum

Video Characteristics

Modulation Type:	Analog FM, Standard (Positive) or Inverted (Negative) Sense, (Selectable)
Video Standard (Specify):	NTSC (10Hz to 4.2MHz, 525 Line D/E) or PAL (10Hz to 5.0MHz, 625 Line D/E), +/- 1.5dB
Output Level:	1 Vpk-pk/±4 MHz @ Crossover Frequency into 75Ω Load
Output Impedance:	75 Ω Nominal, Unbalanced

Audio/Data Subcarrier Characteristics

Subcarriers (Specify):	None, One, or Two - Audio or Data
Subcarrier Frequency (Specify):	5.8, 6.0, 6.2, 6.5, 6.8, 7.2, 7.5, 8.3, or 8.59 MHz, or Custom
Subcarrier Separation (Two):	700 kHz Minimum
Frequency Stability:	±0.5% Over -20°C to +60°C
Subcarrier On/Off Control:	Local, Remote, and Programmable Switch
Modulation Type:	Analog FM, Positive Sense
Frequency Response:	100 Hz to 10 kHz ±1.5 dB (Audio) or DC to 50 kbps (Data)
De-Emphasis:	75 µsec NTSC or 50 µsec PAL (Audio) or None (Data)
Output Level:	-10 dBV and +4 dBu Line / 150 kHz pk-pk @ 1 kHz Rate into 10 kΩ Load (Audio) or RS232 and TTL / 150 kHz pk-pk Deviation (Data)
Output Impedance:	100Ω Nominal, Unbalanced (Audio) or 300Ω (Data)

Configuration Interface Characteristics

Interface Type:	Two-Way UART
Signaling Type (Specify):	RS232, RS422, or 3.3V TTL
Interface Parameters:	9600/8/1/None/None (Baud/Data Bits/Stop Bits/Parity/Handshake)

Power Requirements

Input Voltage:	+11 to +16 Vdc, Reverse Polarity Protected
Current Draw (Typical at 12V):	280 mA
Auxiliary Supply Output:	+12 Vdc, 0.5 A Current Limit

Mechanical

Material:	CNC Machined T6061-T6 Aluminum	
Finish (Specify):	Nickel Plated or Gold Iridite	
Dimensions:	2.50" W x 3.50" L x 0.85" H	
Weight:	<6.5 oz.	
RSSI Displays (Specify):	LCD Analog Bar Meters or LED Light Bars - Local Enable and Intensity Control (LEDs)	
Connectors:	RF Inputs:	SMA Female
	Video Output:	BNC Female
	DC Supply, 12V Out, Comms:	MDM-9P
	Audio Output, Data Output	MDM-9S
	Audio Output:	3.5mm Stereo Jack

Environmental

Temperature (Operating):	-20°C to +60°C
Acceleration:	100 g, 3 Axis
Altitude:	Unlimited
Humidity:	Up to 95% @ Any Temperature Forming Frost or Condensation