

# VSR1 Analog Video/Audio/Data Receiver

*An Excellent Microwave Video Receiver  
with an Exceptionally Low Noise*



## Design Features

- 7.4 Cubic Inch Package (2.50"x3.50"x0.85")
- Weighs < 6 oz.
- Low Current Draw (Extends Battery Life)
- Low Noise Figure (More Range)
- Full Frequency Band Channelization
- 3 Frequency Selection Modes
- Supports Composite Video (NTSC or PAL)
- Optional Dual Audio or Data Subcarriers
- Received Signal Strength Indication (Chassis Display and Remote Query)
- J-STD-001D Class 3 Assembly (Medical/Aerospace)


## VSR1 Series

VSR1 receivers feature innovative circuit designs to reduce power consumption for significantly longer battery life and to reduce noise figure for substantially more range. Lower noise figure improves video quality and reduces the required transmitter output power thereby reducing transmitter battery requirements.

Receiver carrier frequency may be selected locally with BCD rotary switches, remotely, and locally/remotely with a programmable binary switch. Slide switches allow selection between standard (positive) and inverted (negative) video and subcarrier On/Off. Received signal strength is indicated with a local display (LCD meter or LED bar) and via remote query. If equipped with an LED display, intensity may be controlled by a local pushbutton switch.

If your application requires video and audio or data reception, VSR1 receivers are optionally configured with up to 2 audio or data subcarriers with dual outputs for driving auxiliary devices.

VSR1 receivers are ideal for law enforcement, surveillance, UAV, UGV, Military, and other applications requiring high quality diversity video reception in a compact, rugged package.

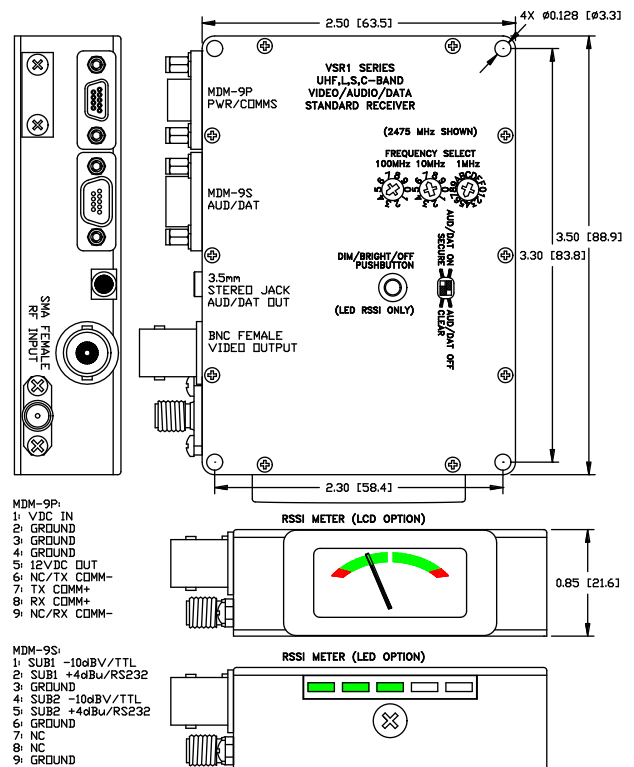

Advanced Microwave Products  
 PO Box 1437  
 2465 Old Highway 40 West, Suite 200  
 Verdi, NV 89439

Phone: (775) 345-9933  
 E-mail: sales@advmw.com  
 Web: www.advmw.com

# VSR1 Analog Video/Audio/Data Receiver

## RF Characteristics

Frequency Range (Specify):	UHF:	340.0-399.9 MHz	100 kHz Channels
(Other Ranges Available)	Lower L-Band:	1435-1535 MHz	1 MHz Channels
	Upper L-Band:	1700-1850 MHz	1 MHz Channels
	Lower S-Band:	2200-2399 MHz	1 MHz Channels
	Upper S-Band:	2400-2499 MHz	1 MHz Channels
	Full S-Band:	2200-2499 MHz	1 MHz Channels
	Dual L/S-Band:	1700-1850/2200-2499 MHz	1 MHz Channels
	Lower C-Band:	4400-4900 MHz	1 MHz Channels
	Upper C-Band:	4900-4999 MHz	1 MHz Channels
	Full C-Band:	4400-4999 MHz	1 MHz Channels
	5.8 GHz:	5725-5875 MHz	1 MHz Channels
Frequency Selection (Specify):	Full Band Channelized - Remote Control Only or Remote/Programmable Switch/Local BCD		
Maximum RF Input:	+10 dBm Without Damage		
Input Impedance:	50 $\Omega$ Nominal, VSWR 2:1 Maximum		
Noise Figure:	< 3 dB		
Image Rejection:	> 60 dB		
Signal Strength Output:	Local Display and Remote Query		

## LO/IF Characteristics

LO Stability:	$\pm 5$ ppm Over -20°C to +60°C
IF Frequency:	UHF: 153.6 MHz, L/S: 374 MHz, C/5.8 GHz: 480 MHz
IF Bandwidth:	17 MHz Nominal
Harmonic and Spurious Level:	-25 dB Maximum

## Video Characteristics

Modulation Type:	Analog FM, Standard (Positive) or Inverted (Negative) Sense, (Selectable)
Video Standard (Specify):	NTSC (10Hz to 4.2MHz, 525 Line D/E) or PAL (10Hz to 5.0MHz, 625 Line D/E), +/- 1.5dB
Output Level:	1 Vpk-pk $\pm 4$ MHz @ Crossover Frequency into 75 $\Omega$ Load
Output Impedance:	75 $\Omega$ Nominal, Unbalanced

## Audio/Data Subcarrier Characteristics

Subcarriers (Specify):	None, One, or Two - Audio or Data
Subcarrier Frequency (Specify):	5.8, 6.0, 6.2, 6.5, 6.8, 7.2, 7.5, 8.3, or 8.59 MHz, or Custom
Subcarrier Separation (Two):	700 kHz Minimum
Frequency Stability:	$\pm 0.5\%$ Over -20°C to +60°C
Subcarrier On/Off Control:	Local, Remote, and Programmable Switch
Modulation Type:	Analog FM, Positive Sense
Frequency Response:	100 Hz to 10 kHz $\pm 1.5$ dB (Audio) or DC to 50 kbps (Data)
De-Emphasis:	75 $\mu$ sec NTSC or 50 $\mu$ sec PAL (Audio) or None (Data)
Output Level:	-10 dBV and +4 dBu Line / 150 kHz pk-pk @ 1 kHz Rate into 10 k $\Omega$ Load (Audio) or RS232 and TTL / 150 kHz pk-pk Deviation (Data)
Output Impedance:	100 $\Omega$ Nominal, Unbalanced (Audio) or 300 $\Omega$ (Data)

## Configuration Interface Characteristics

Interface Type:	Two-Way UART
Signalling Type (Specify):	RS232, RS422, or 3.3V TTL
Interface Parameters:	9600/8/1/None/None (Baud/Data Bits/Stop Bits/Parity/Handshake)

## Power Requirements

Input Voltage:	+11 to +16 Vdc, Reverse Polarity Protected
Current Draw (Typical at 12V):	230 mA
Auxiliary Supply Output:	+12 Vdc, 0.5 A Current Limit

## Mechanical

Material:	CNC Machined T6061-T6 Aluminum
Finish (Specify):	Nickel Plated or Gold Iridite
Dimensions:	2.50" W x 3.50" L x 0.85" H
Weight:	<6 oz.
RSSI Display (Specify):	LCD Analog Bar Meters or LED Light Bars - Local Enable and Intensity Control (LED)
Connectors:	RF Input: SMA Female
	Video Output: BNC Female
	DC Supply, 12V Out, Comms: MDM-9P
	Audio Output, Data Output: MDM-9S
	Audio Output: 3.5mm Stereo Jack

## Environmental

Temperature (Operating):	-20°C to +60°C
Acceleration:	100 g, 3 Axis
Altitude:	Unlimited
Humidity:	Up to 95% @ Any Temperature Forming Frost or Condensation